

# H 7i

Compactor with smooth drum


Compactors Series H CompactLine / Series H270









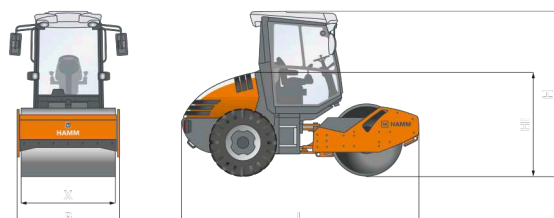



## HIGHLIGHTS H CompactLine

- > 3-point articulation for outstanding traction and off-road mobility
- > Simple, intuitive and language-neutral operation
- > Excellent view of the machine and the construction site
- > High climbing ability
- > Compact dimensions

Machine dimensions		
Total length (L)	mm	4409
Width (B)	mm	1844
Total height (H)	mm	2925
Drum width (X)	mm	1680
Height loading, min. (Hl)	mm	2925



EU Stage V /  
EPA Tier 4

TECHNICAL DATA		Unit	H 7i
	<b>Weights</b>		
	Operating weight with cab	kg	6540
	Operating weight with ROPS	kg	6320
	Operating weight, max.	kg	8040
	Axle load, front/rear	kg	3980/2560
	Static linear load, front	kg/cm	23,7
	French classific., data/class		30,9/VM2
	<b>Machine dimensions</b>		
	Total length	mm	4409
	Total height with cab	mm	2925
	Height loading, min.	mm	2925
	Wheel base	mm	2306
	Total width with cab	mm	1844
	Ground clearance, centre	mm	317
	Turning radius, inside	mm	3310
	Angle of driving slope, front/rear	°	38/42
	<b>Drum dimensions</b>		
	Drum width, front	mm	1680
	Drum diameter, front	mm	1216
	Drum thickness, front	mm	25
	Drum type, front		smooth
	<b>Wheel dimensions</b>		
	Size of tyres, rear		AW 14.9-24 8 TL
	<b>Diesel engine</b>		
	Manufacturer		KUBOTA
	Version		V3307-CR-T
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		55,4/75,3/2200
	Power rating SAE J1349, kW/HP/rpm		55,4/74,2/2200
	Emission standard		EU Stage V / EPA Tier 4
	Exhaust gas after-treatment		DOC-DPF
	<b>Drive</b>		
	Speed, working gear	km/h	0-6,0
	Speed, transportation gear	km/h	0-12,5
	Climbing ability, vibration on/off	%	55/60
	<b>Vibration</b>		
	Vibration frequency, front, I/II	Hz	30/42
	Amplitude, front, I/II	mm	1,71/0,66
	Centrifugal force, front, I/II	kN	125/95
	<b>Steering</b>		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	<b>Tank capacity/Fill capacity</b>		
	Fuel tank, capacity	L	123
	<b>Sound level</b>		
	Acoustic power LW(A), sticker		104
	Acoustic power LW(A), measured		

#### EQUIPMENT

12 V sockets (double), 2 large working and rear view mirrors, 3-point articulation, Trays, Anti-slip control, Fixture for cold box, ECO mode, Spring-mounted driver's seat with armrest and safety belt, Large angle of driving slope at front and rear, Hose protection on front vehicle, Maintenance points, central on one machine side, CE conformity, ROPS, rigid, Steering column adjustment, Lighting package as per road traffic regulations

#### OPTIONAL EQUIPMENT

ROPS cabin with heating and door to the left, FOPS-approved (level I), Safety belt monitoring device, Air conditioning, Radio, HCQ Navigator, Protective roof, Dozer blade, Padfoot shells, HAMM Compaction Meter (HCM), Speedometer, Automatic engine-off function, Telematics system, interface, Automatic vibration system, Working lights, Rotating beacon, Battery isolation switch

**HAMM AG**  
Hammstraße 1  
D-95643 Tirschenreuth  
Tel +49 9631 80-0  
Fax +49 9631 80-111  
www.hamm.eu

